



Properties

Length

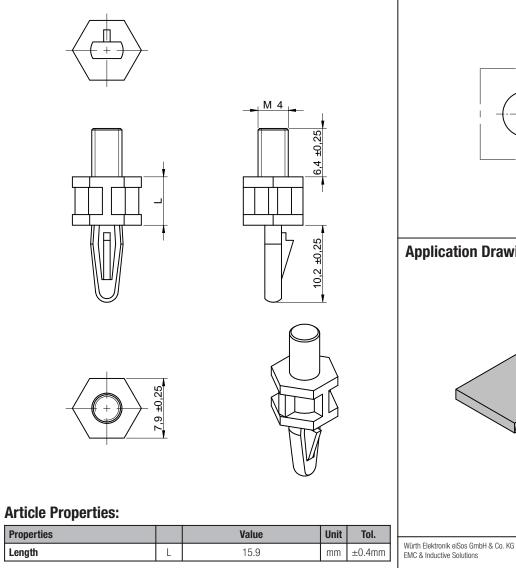

Drilling in Panel:



Scale - 3:1

Application Drawing:

Max-Eyth-Str. 1


Germany

74638 Waldenburg

www.we-online.com

eiSos@we-online.com

Tel. +49 (0) 79 42 945 - 0



Properties:

•						
Properties		Value	Unit	Tol.		
Material	Nylon 66					
Color	Natural					
Flammability Rating according to	UL94 V-2					
Operating Temperature	-30 °C up to +85 °C					
Thread	M4					
Wrench	SW	7.9 mm ±0.3				
Hole Diameter ¹⁾	Øf	4.1	mm			
Panel Thickness		1.6	mm	max.		
Drilling in Panel ²⁾		4	mm	±0.08mm		

¹⁾ The Hole Diameter is the drill hole in the PCB for the Thread. ²⁾ The Drilling in Panel is the drill hole in the PCB for the Snap-in.

Use with:

CREATED

DaMa

DESCRIPTION

Use with Product

Packaging Properties:

CHECKED

JuSa

Circuit Boards WA-SNTE

REVISION

001.000

Snap-In Stop Spacer for Printed

STATUS

Valid

GENERAL TOLERANCE

DIN ISO 2768-1m

Packaging	Bag
Packaging Unit (Qty.)	1000

Würth Elektronik 709940400

PROJECTION METHOD

ORDER CODE

DATE (YYYY-MM-DD)

2015-11-10

709905640

 \oplus

PAGE

1/3

BUSINESS UNIT

eiCan

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information intended for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information intended for use in equivalent is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information network etc.. Wurth Elektronik elSos GmbH & Co KG must be information intended to use is electronic component which is used in electrical circuits there adjust high standard is especially executed an electronic component which is used in electrical circuits there are electrical circuits ther

WÜRTH ELEKTRONIK

Article Properties:

L	Thread	SW	Order Code		
3.2 mm			709905611		
4.8 mm	M3	4.8 mm ±0.2	709905621		
6.4 mm			709905631		
0.4 11111	M4	7.9 mm ±0.3	709905610		
7.9 mm	- M3	4.8 mm ±0.2	709905641		
0.5 mm	IVIO	4.0 IIIIII ±0.2	709905651		
9.5 mm	M4	7.9 mm ±0.3	709905620		
11.1 mm	M3	4.8 mm ±0.2	709905661		
10.7	IVIJ	4.0 IIIIII ±0.2	709905671		
12.7 mm	M4	7.9 mm ±0.3	709905630		
14.3 mm	- M3	4.8 mm ±0.2	709905681		
15.0	IVIS	4.0 IIIIII ±0.2	709905691		
15.9 mm			709905640		
19.1 mm			709905650		
22.2 mm	M4	7.9 mm ±0.3	709905660		
28.6 mm]		709905670		
35.7 mm			709905680		

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions					CREATED CHECKED GENERAL TOLERANCE DaMa JUSa DIN ISO 2768-1m				
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com		Snap-In Stop Spacer for Printed Circuit Boards WA-SNTE				ORDER CODE			
eiSos@we-online.com			REVISION 001.000	status Valid		70990 DATE (YYYY-MM-DI 2015-11-10)	BUSINESS UNIT eiCan	PAGE 2/3

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety restriction. Quipment of were leactrical cruited because severe personal injury or death, unless the parties have executed an agreement specifically governing such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in the require injury and reliability relations or performance.

Important Notes

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions		CREATED DaMa			PROJECTION METHOD				
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com		Snap-In Stop Spacer for Printed Circuit Boards WA-SNTE				ORDER CODE 709905640			
			REVISION 001.000	status Valid		DATE (YYYY-MM-DD 2015-11-10	,	BUSINESS UNIT eiCan	PAGE 3/3

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in entential submit and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be information intervork etc... Würth Elektronik elSos GmbH & Co KG must be information intervork etc... Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usege before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high state the require high state to every electrical circuits that require high state the require high state to every electrical circuits that require high state to every electrical circuits that require high state the require high state to every electrical circuits that require high state to